

- **Liquid cooled linear amplifier**
- **1.6 – 30 MHz continuous coverage**
- **1 kW or 500 W continuous duty cycle (100%)**
- **USB, LSB (SSB), CW, FSK, AM**
- **Remote control via IP and WiFi**
- **Compatible with existing 4 & 6 digital selective calling radio networks**
- **2G & 3G Automatic Link Establishment (ALE) options**
- **ARINC ICAO Annex 10 Aeronautical Selcall option**
- **Field re-programmable via USB**
- **ED-137C Interoperability Standard**

The Barrett 4075 high power HF Transmitter is a compact rack mounted communications solution developed for base station applications in large HF networks. It can be supplied in 1kW and 500 W versions. The transmitter comes as a complete package with an exciter, power supply, power amplifier, interconnecting cables and all required rack mount hardware.

The 4075 linear amplifier is designed and engineered for modern communications which are heavily data orientated, requiring the equipment to work at high duty cycles for extended periods of time. The unique liquid cooled design increases cooling efficiency resulting in less system deterioration due to overheating in the power stages, extending overall equipment service life.



**The Barrett 4075 amplifier natively supports the Barrett 4050 HF SDR Transceiver/Exciter**

The compact rack mounted amplifier, together with its power supply occupies just 5U of cabinet space.


The Barrett 4075 amplifier natively supports the Barrett 4050 Transceiver/Exciter which when coupled requires no further tuning or adjustment. A flexible I/O interface and analogue ALC feedback provide the transceiver/exciter full control over final output power. Intelligent electronic controls protect the 4075 from input and output overload while providing a sophisticated early warning and a diagnostic interface for system monitoring and event logging. Customisable auxiliary ports are also available for enhanced system control.

The 4075 system is field re-programmable via USB allowing the end user to update system software. An on-board micro SD card provides enhanced flexibility for display customisation and event logging.

The Barrett ISO9001 Quality Assurance Program ensures consistent performance and the highest reliability.



# 4075

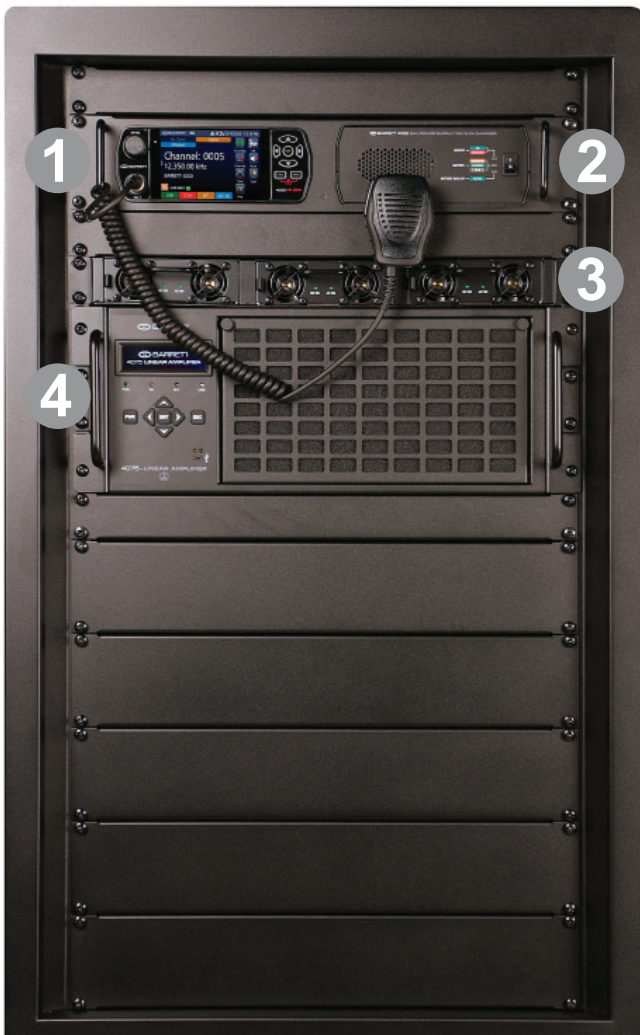

## Typical 4075 High power 1 kW HF transmitter example

- 1 Barrett 4050 SDR HF transceiver exciter
- 2 Barrett 4022 24V Power supply
- 3 Barrett 4075 48V Power supply
- 4 Barrett 4075 Linear amplifier

The Barrett 4075 High power 1kW and 500W systems are available in 20RU and 39RU 19" racks with a depth of 700 mm. The 4075 500W HF transmitter is also available in a rugged transportable 9RU 19" rack mount case. The packages ship as a complete unit including rack mounting kits, blanking plates and all necessary cables and hardware ready for operation. For full package details, including part numbers please download the systems catalogue from our website.

## General Specifications

<b>Frequency coverage</b>	1.6MHz to 30MHz
<b>Frequency stability</b>	±0.5 ppm (±0.1 ppm optional) -30°C to +60°C (4050 Transceiver/Exciter)
<b>Channel capacity</b>	1000 with 4050 HF Transceiver
<b>Modes</b>	J3E (USB, LSB) - H2B (AM) - J2A (CW) - (CF (Custom Filter) - ISB (data option)
<b>Power output</b>	1000W PEP or 500W PEP
<b>Duty cycle</b>	100%, Continuous PEP, CW
<b>Exciter</b>	4050 HF SDR transceiver

## 4075 Linear Amplifier Specifications

<b>Power Output CW</b>	1kW or 500W ± 1.5 dB
<b>Power Gain</b>	+25 dB
<b>Harmonics &amp; Spurious</b>	Less than -55 dB
<b>ALC Voltage (output)</b>	0 ~ 10V
<b>Filter Type</b>	7 Band LPF
<b>Dimensions</b>	178H x 482W x 480D mm excluding handles and I/O connectors
<b>Power Requirements</b>	50V dc @ 60A, 24V dc @ 2.5 A max
<b>Rack Height</b>	5RU, 19" Rack mount (Amplifier and 50V power supply only)
<b>Weight</b>	35 kg (77 lbs)
<b>Cooling</b>	Liquid cooled, Water, Propylene Glycol mixture
<b>Temperature</b>	-20°C to +65°C operational, -40°C to +85°C storage
<b>Humidity</b>	95% relative, non condensing
<b>Altitude</b>	3000 m above sea level (not airborne), 9000m transportation
<b>Input overdrive protection</b>	+6 dBm max
<b>Output VSWR protection</b>	3:1 nominal all magnitude and phases
<b>Thermal Overload protection</b>	85°C
<b>Fault Log</b>	System events and error reporting
<b>Standards</b>	Designed to meet or exceed: <ul style="list-style-type: none"> <li>- FCC/IC/ETS</li> <li>- CE</li> <li>- Australia/New Zealand AS/NZS 4770 2000 and AS/NZS 4582:1999</li> </ul>

Specifications are typical. Equipment descriptions and specifications are subject to change without notice or obligation.

BCB40750/6

**Head Office:**  
Barrett Communications Pty Ltd  
47 Discovery Drive, Bibra Lake,  
WA, 6163 AUSTRALIA  
Tel: +61 8 9434 1700  
Fax: +61 8 9418 6757  
Email: [information@barrettcommunications.com.au](mailto:information@barrettcommunications.com.au)

